




LUXURY RIGID VINYL-CLICK FLOORING

**FITTED AS A "FLOATING" FLOOR
NO GLUE REQUIRED
THE EASIEST FLOOR YOU WILL EVER INSTALL**



5.35mm SPC (Stone-Plastic-Composite) Vinyl-Click Flooring
3.80mm SPC Core, Vinyl wear layer 0.55mm. PU Coated Surface
Pre-attached Virgin High Density IXPE underlay 1.00mm. Total depth 5.35mm.

"Easy to Fit!"™

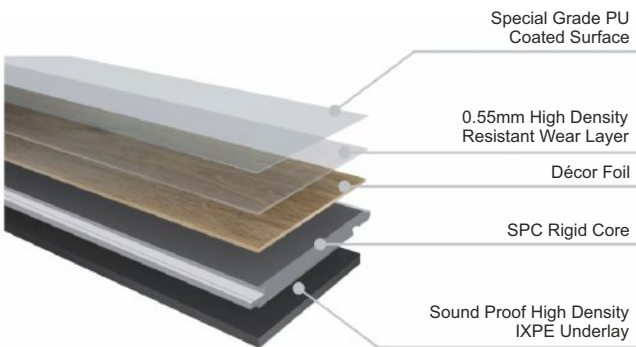

FEATURES

- ✓ 100% VIRGIN VINYL
- ✓ 20 YRS GUARANTEE DOMESTIC
- ✓ 10 YRS GUARANTEE LIGHT COMMERCIAL
- ✓ VERY STABLE - HIGH TEMPERATURE RESISTANT
- ✓ 100% WATERPROOF
- ✓ MICRO-BEVELLED EDGES
- ✓ RESISTANT TO UV LIGHT
- ✓ PU PROTECTED
- ✓ SUITABLE FOR WALLS





LUXURY RIGID VINYL-CLICK FLOORING

KlickerFloor® has the realistic look of either wood, stone, or ceramic flooring.
It is extremely hard wearing and resilient to daily wear & tear.

The flooring is warm to touch and is more sound absorbent than wood, laminate, and ceramic tile flooring.

KlickerFloor® is coated with millions of ceramic microspheres to form a scratch resistant, waterproof wipe clean surface that is suitable for any room in the home or office.

TILE RANGE

TILE 12.01" x 24.02" • 305mm x 610mm
10 TILES PER PK 1.86m²

**"Easy
to
Fit!"**™



Carrara White Marble Gloss




Sand Stone




Light Grey Stone



Dark Grey Stone



Verona Grey Marble



Grey Marble



Anthracite Marble



Oiled Slate



Floor Cleaner
recommended

WOODPLANK RANGE

WOODPLANK 7.09" x 48.03" • 180mm x 1220mm
10 PLANKS PER PK 2.2m²



BENEFITS

- Pre-applied IXPE high density underlay
- Greater than R10 slip resistance
- No acclimatisation required



KLICKERFLOOR® SPC VINYL CLICK FLOORING

Product information		Woodplank	Stone/ Tile
Level of use	EN ISO 10874	23 - 33 - 42	23 - 33 - 42
Total thickness	EN ISO 24346	ca. 5.35mm	ca. 5.35mm
Wear layer	EN ISO 24340	ca. 0.55mm	ca. 0.55mm
Wear layer PUR treatment	-	PUR	
Total weight kg/m ²	EN ISO 23997	8.85kg/m ²	8.85 kg/m ²

Size & Packaging

Plank / Tile size	EN ISO 24342	180mm x 1220mm	305mm x 610mm
Pieces per box	Per pack	10	10
Coverage per box	Per pack	2.196m ²	1.86m ²

Test Results

Inflammability	EN 13501	Bfl-S1	
Scratch resistance	EN ISO 660-2	Class T	
Squareness & straightness	EN ISO 24342	≤0.25mm	
Slip resistance	EN 13893	X direction:0.46, Y direction:0.51	
Slip restraint	DIN 51130	R10	R10
Residual indentation	EN ISO 24343-1	≤0.10mm(without IXPE)	
Furniture leg resistance	EN ISO 16581	32kg , X direction and Y direction have no visible damage.	
Curling	EN ISO 23999	≤2.0mm	
Electrical resistance	EN 1081	/	
Dimensional stability	EN ISO 23999	≤0.25%	
Thermal conductivity	EN ISO 10456	0.132 W/(m.k)	
Thermal resistance R	(ISO 8301)	0.049 (m ² .k)/K	
Electrostatic performance	EN 1815	0.60kv	
VOC	ISO 16000	A+	
Acoustic insulation	EN ISO 717-2	19dB	
Castor chair resistance	EN ISO 4918	No damage to wear layer, no delamination	
Stain resistance	EN ISO 26987	Very good	
Light fastness	EN ISO 105-B02	≥6 grade	
Underfloor heating	EN 12524	Suitable with Klickermat®, max 27°C	
Resistance to chemicals	EN 423	Use Klickerfloor® Cleaner	Use Klickerfloor® Cleaner
Warranty		20 yrs. Residential / 10 yrs. Commercial	
Click Profile		Unilin Unidrop®	

